

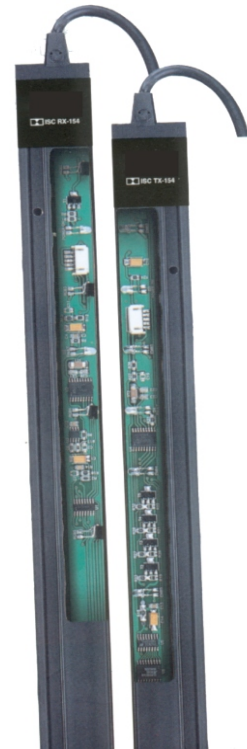
**Door detector type "Photocurtain"****DOOR DETECTOR ISC-X-154**

Code: 3619

MOUNTING KIT

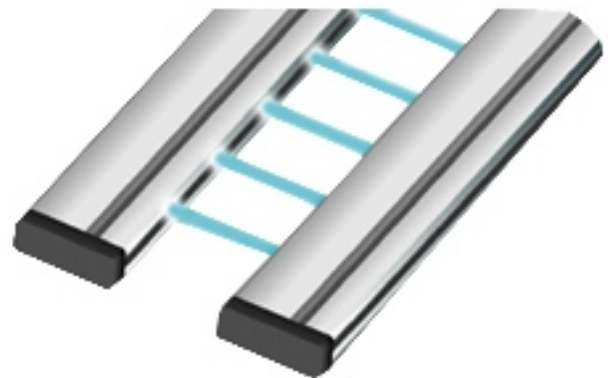
Code: 3620MK

Detector type	ISC-X-154
Quantity of sensing points	32
Quantity of beams	154
Operating distance	3000mm
Supply voltage	220 VAC
Output	relay contact 6A,no&nc
Tones signal	yes
Mechanical dimensions	9,4 X 38 X 2000mm
Automatic beam cancelling	up 4 diodes, by on-off
Different height of barrier or different voltage	available by order
Mounting kit	suitable for different kind door systems

**DOOR DETECTOR BL-LIFT**

Code: 3619BL

Dimensions	9 X 28 X 2000mm
Number of sensors	94
Number of beams	212
Scanning distance	4000mm
Detecting height	23mm $\mu\epsilon$ 1823mm
Vertical displacement	+/-25mm
Horizontal displacement	+/-5mm
Angular displacement	+/-15mm
Scan speed	40msec
Response time	60msec
Vandalism detection	15sec
Led illumination	>100.000lux
IP trans. / receiver	IP 55
IP power supply unit	IP 31
Temperature rate	-10C ~ +65C
Contact rele	2A / 30VDC

**Door detector type "Photocell"**

Type	Fotostar AECO
Supply voltage	12 ~ 240 V AC/DC
Output	relay contact 1A, 240V

Door detector type "AECO"

Code: 3401