


SERVOWEDGE COD.:A.E.P.-01

VOLTAGE FOR THE ACTIVATION: FROM 24V TO 100V DC / AC
VOLTAGE SUPPLY : 24V DC / AC

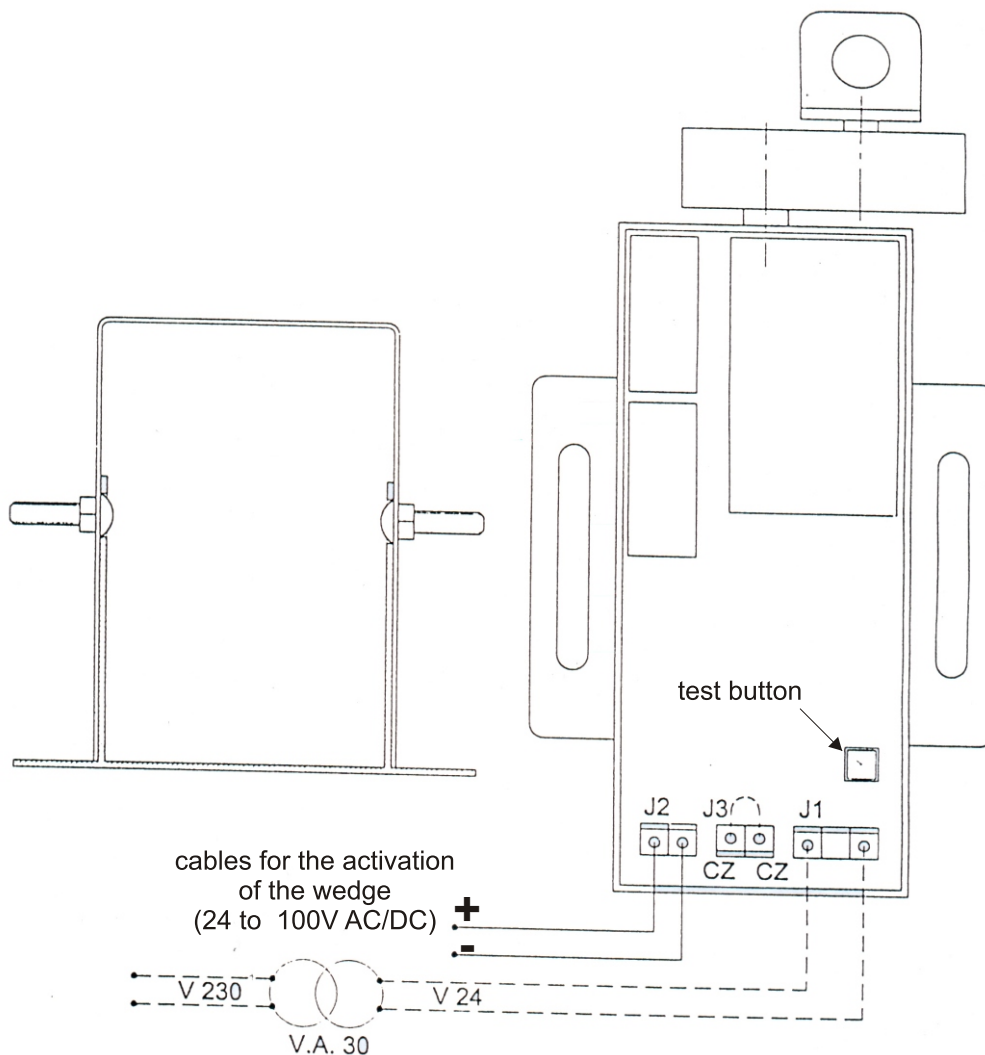

TERMINAL BLOCK J2: Connection for the wedge (From 24 to 100V DC/AC).
Pay attention to the polarity of the connection

TERMINAL BLOCK J1: Connection for the supply of the curcuit 24V DC/AC.
In case we have not this kind of voltage we can use
one-phase transformer 220V 30VA.

NOTE: The servomechanism has protection in case of
wrong polarity connection in dc.